


Panelex® Addapt

Design solutions by  Lamitech

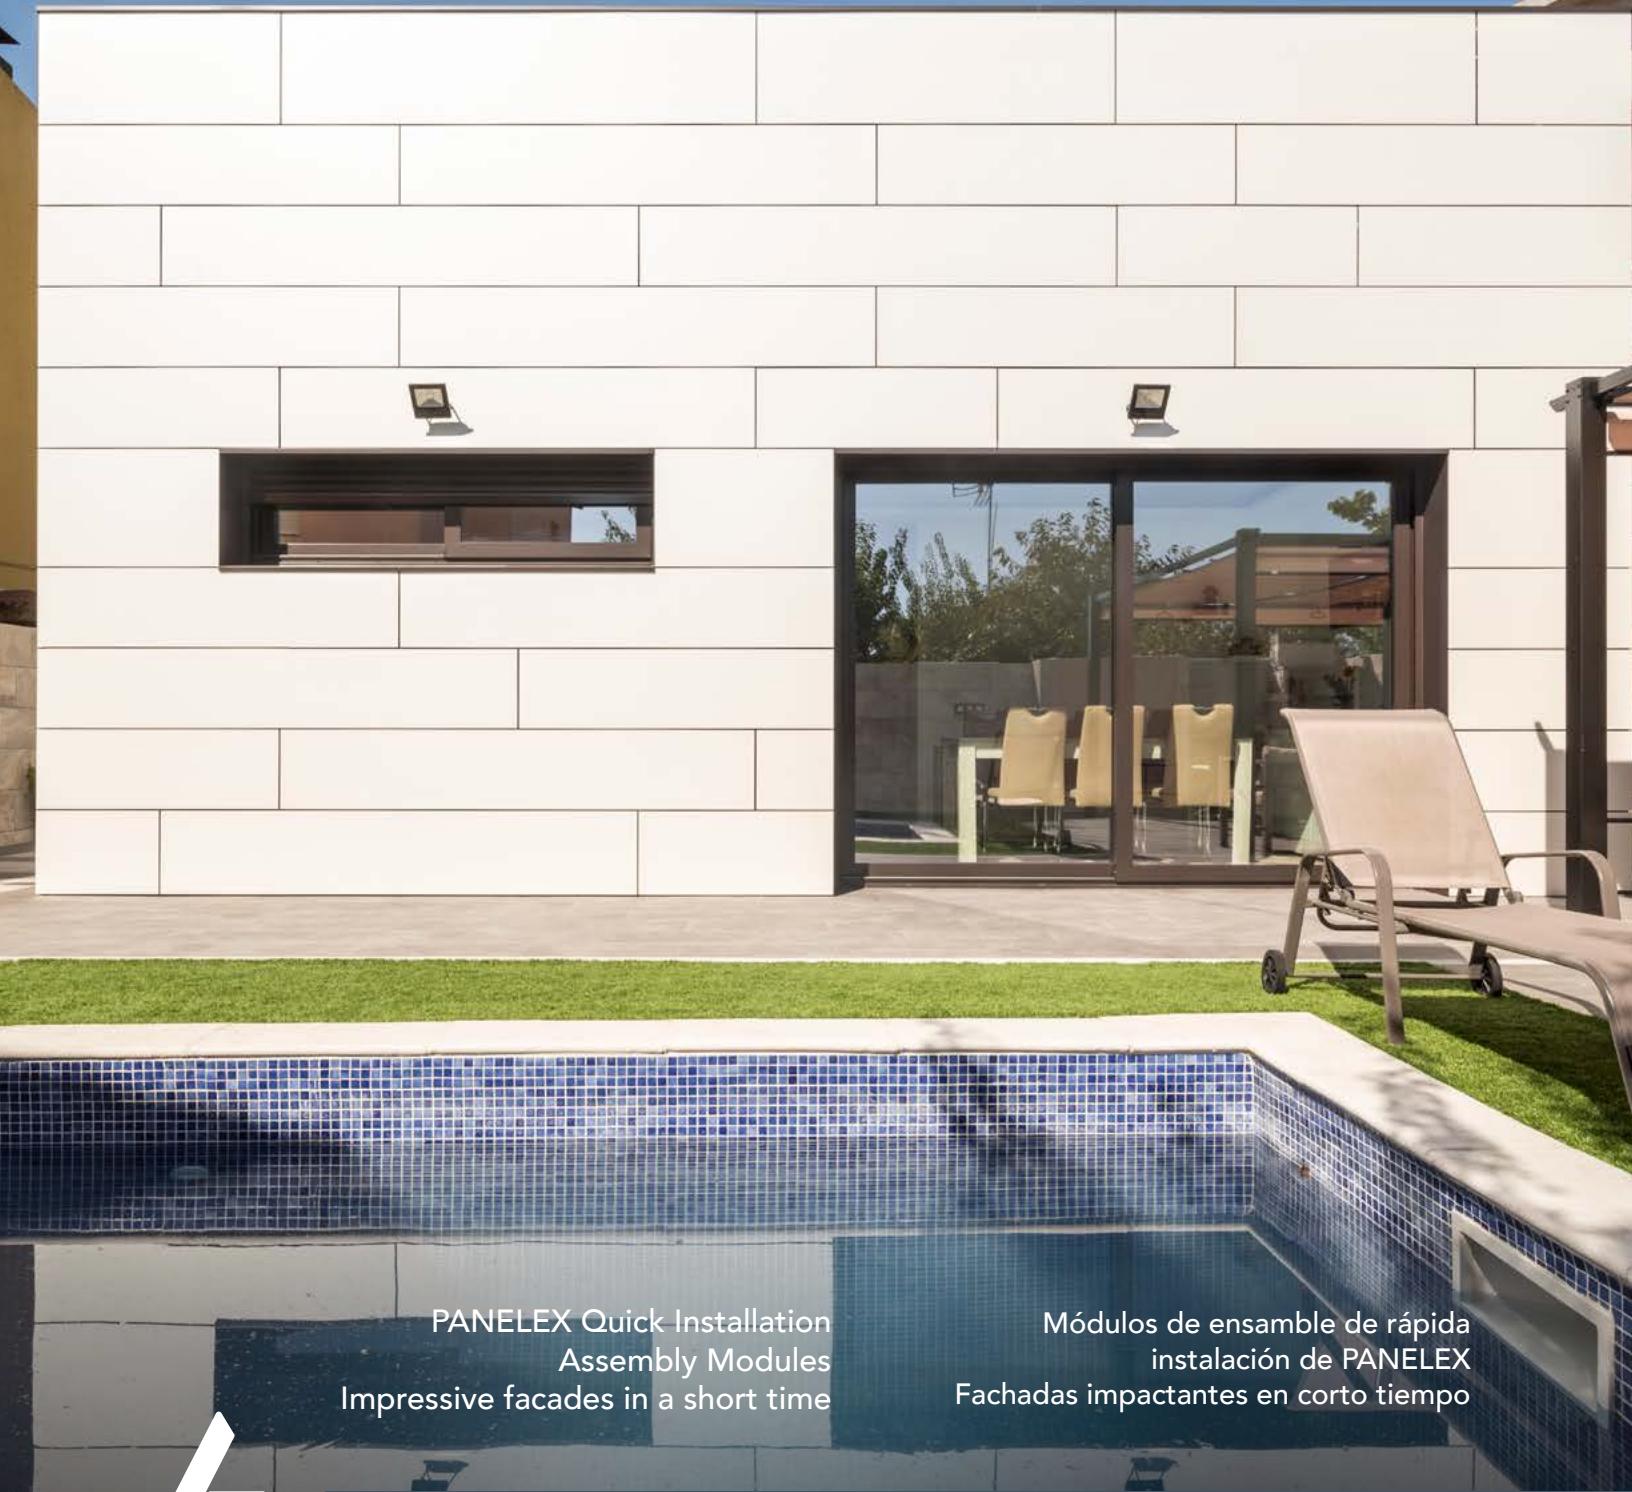

PANELEX Quick Installation
Assembly Modules
Impressive facades in a short time

Módulos de ensamblaje de rápida
instalación de PANELEX
Fachadas impactantes en corto tiempo



Lamitech

lamitech.co



Index

03-06 English
Catalog

Índice

07-10 Catálogo
Español

What is Panelex® Addapt?

It is a fast and practical installation solution whenever you require fast and easy low height façades (up to 2 floors).

Panelex® Addapt are standard 8 mm (5/16") Panelex modules that are assembled with the help of clips to the vertical installation profiles, allowing a quick and clean installation.

Ideal sizes to achieve multiple combinations and design configurations, optimizing the required structure, time and the degree of demand of the installation process.

It offers a selection of fast delivery lines among solid colors, woodgrains and stones for projects that require a quick response.

ADDAPT is available in 2 standard modules: 600 and 1200.



Addapt 600

Format	582 mm x 388 mm
Façade Module	574 mm x 384 mm
Façade Coverage area	0.22 m ²
Panel Thickness	8 mm (5/16")
Minimum order quantity	12 Modules (2,64 m ² area on the Façade)

Addapt 1200

Format	1156 mm x 388 mm
Façade Module	1148 mm x 384 mm
Façade Coverage area	0.44 m ²
Panel Thickness	8 mm (5/16")
Minimum order quantity	6 Modules (2,64 m ² area on the Façade)





CARBON NEUTRAL

Panelex is produced under a system that measures, controls and balances emissions. We compensate our footprint and favor the environment.



ENVIRONMENTALLY FRIENDLY

Composed by 70% of renewable sources.



UV RESISTANT

Protection against U.V. discoloration, assuring color stability over time.



ANTI GRAFFITI*

Allowing paint removal.



ANTI- INSECTS

It does not suffer any kind of insect attack. Inert material preventing fungal growth.



MULTIFORMAT

Multiple sizes.



HIGH CLEANABILITY

Minimizing maintenance costs.



THERMAL - ACOUSTIC

It acts independently as thermal and acoustic insulation.



FLOATING SYSTEM

Floating point fixing, allowing greater movement of the panels.



SELF-SUPPORTING

Even with large perforated areas in their design.



FIRE RESISTANCE

Complying with NFPA 285 standard.



IMPACT RESISTANT

Due to its high impact resistance, it can be exposed to high traffic areas, such as sports areas.

Portfolio

Available in our full range of Panelex



Scan or [click here](#)
to Download
Panelex catalog.

Quick SHIP: 6 colors




Lineal Oak 1467




Palisander 1839



Olive Elm 1503

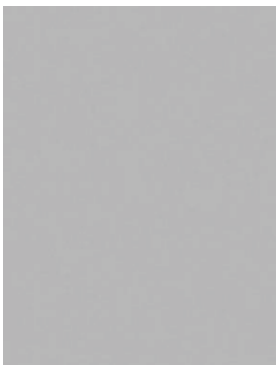

Fog 2108

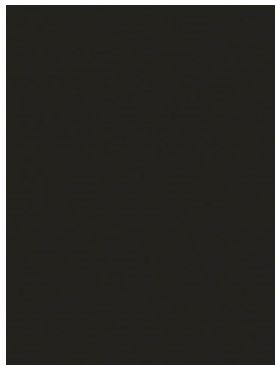

Graphite 2174



Terra Steel 3116

Available references come in 8 mm thick, one side (Type A), matte finish (MT)


Type A: One side panel, high specification quality with high weather resistance, high resistance filter UV radiation resistance and high cleanability with anti-graffiti properties on the surface.

*Visit panelex.com.co for details about recommended cleaning and maintenance



Lamitech

lamitech.co

We are carbon neutral
 **BIG house project**
OUR PLANET, THE BEST PROJECT



* Please ask for our certified references.
The mark of responsible forestry
FSC C116247



¿Qué es Panelex® Addapt?

Es una solución de instalación rápida y práctica para montaje de fachadas de bajas alturas (hasta 2 pisos).

Panelex® Addapt son módulos estándar en Panelex de 8 mm que se ensamblan con la ayuda de clips a los perfiles verticales de instalación, permitiendo una instalación rápida y limpia.

Tamaños ideales para lograr múltiples combinaciones y configuraciones de diseño, optimizando la estructura requerida, el tiempo y el grado de exigencia del proceso de instalación.

Ofrece una selecta línea de entrega rápida entre unicolors, maderas y piedras permitiendo responder a proyectos que requieran rápida respuesta.

ADDAPT está disponible en 2 módulos estándar: 600 y 1200.



Addapt 600

Formato	582 mm x 388 mm
Módulo Fachada	574 mm x 384 mm
Superficie de cobertura de fachada	0.22 m ²
Espesor del panel	8 mm
Cantidad mínima pedido	12 Módulos (2,64 m ² área en fachada)

Addapt 1200

Formato	1156 mm x 388 mm
Módulo Fachada	1148 mm x 384 mm
Superficie de cobertura de fachada	0.44 m ²
Espesor del panel	8 mm
Cantidad mínima pedido	6 Módulos (2,64 m ² área en fachada)



Panelex[®] Addapt Características



CARBÓN NEUTRO

Es producido bajo un sistema de medición, control y balance de emisiones. Compensamos nuestra huella y favorecemos el medio ambiente.



ALTA LIMPIABILIDAD

Minimiza los costos de mantenimiento.



AMBIENTALMENTE AMIGABLE

Compuesto por un 70% de fibras de madera proveniente de fuentes enteramente renovables.



TÉRMICO - ACÚSTICO

Actúa independientemente como aislante térmico y acústico.



RESISTENTE A LOS RAYOS UV

Protección contra la decoloración por radiación U.V. de los rayos solares, garantizando estabilidad de color en el tiempo.



SISTEMA FLOTANTE

Sistemas de fijación flotados e independientes de la estructura principal del edificio, lo que permite mayor control de movimiento de los planos de fachada.



ANTI GRAFFITI*

Propiedad anti-adherente para facilitar la remoción de pinturas.



AUTOPORTANTE

Los paneles conservan su propiedad autoportante aun con amplias áreas perforadas en su diseño.



ANTIPLAGAS

No sufre ningún tipo de ataque de insectos. Material inerte previene el crecimiento de hongos en la superficie.



RESISTENTE AL FUEGO

En cumplimiento de la norma NFPA 285.



MULTIFORMATO

Múltiples tamaños.



RESISTENCIA AL IMPACTO

Por su alta resistencia al impacto, puede estar expuesto en zonas donde se registra un alto tráfico de usuarios, incluso en áreas deportivas.

Disponible en toda la línea de Panelex




Escanee o [haga clic aquí](#)
para descargar el
Catálogo de Panelex.

Entrega Rápida: 6 colores




Roble Lineal 1467

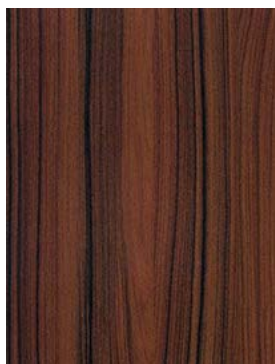


Palisander 1839



Olive Elm 1503

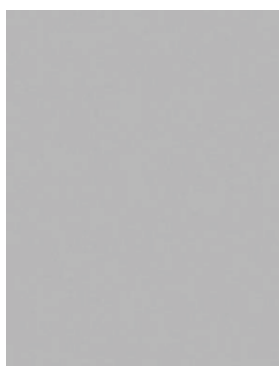

Humo 2108

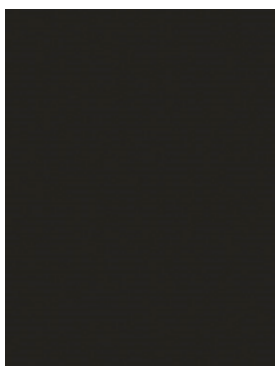

Grafito 2174



Terra Steel 3116

Las referencias disponibles vienen en 8 mm de espesor, unifaz (Tipo A), en acabado mate (MT)

Tipo A: Unifaz, calidad de alta especificación con alta resistencia a la intemperie, filtro de alta resistencia a los rayos UV y alta limpiabilidad con propiedades antigraffiti en superficie.*

*Visite panelex.com.co para detalles de mantenimiento y limpieza recomendados



Lamitech

lamitech.co

Somos carbón neutro



Encuétranos como:
ILAMINAR



ISO 9001
ISO 14001
BUREAU VERITAS
Certification



*Pregunte por nuestras referencias certificadas.
La marca del manejo forestal responsable
FSC® C116247

